

Composites in the Energy Sector



Scott Finn
General Electric
March 20, 2008



Some Composite Applications at GE



Propellers



Fan Case



Nacelles



Aircraft Engine Fan Blades



Thrust Reversers



Wind Turbine Blades



Aircraft Components



Offshore Risers



McLaren Chassis




Military Engine Components



MRI System Components

Projected World Energy Use

Energy
Consumption
(quadrillion BTU)

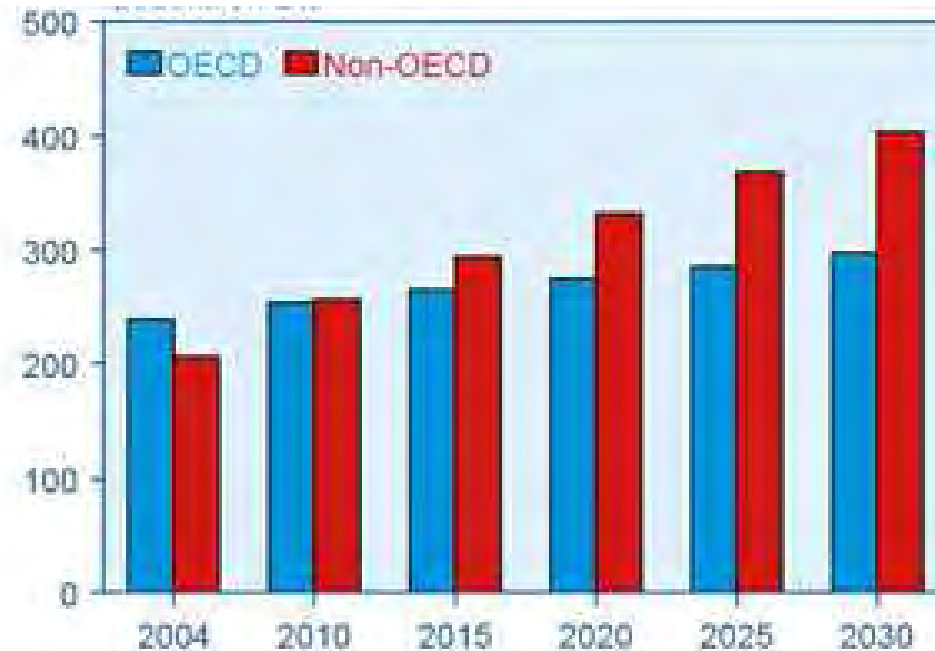

Sources: 2004: Energy Information Administration (EIA), *International Energy Annual 2004* (May-July 2006), web site www.eia.doe.gov/iea. Projections: EIA, *System for the Analysis of Global Energy Markets* (2007).

Steady growth in already developed countries
Rapid growth in developing countries

Energy Sector Composite Products




Flywheels




Wind Turbine Blades



Marine Oil Risers

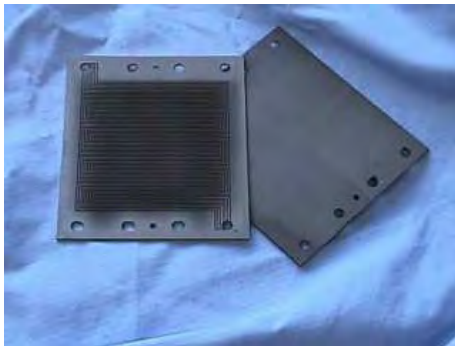

Fuel Cell
Bipolar Plates

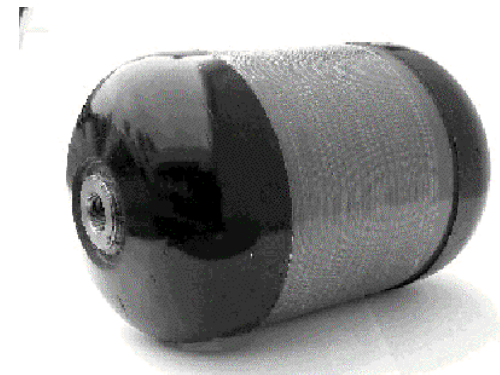

Fuel Storage


Wind Technology



Wind Energy Market

Cost of Electricity


¢ per kWhr

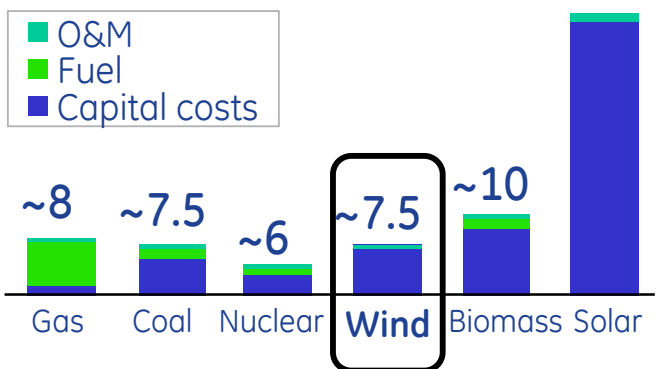

high capital costs puts premium on inexpensive materials and manufacturing

Forecast

Projected US Wind Growth

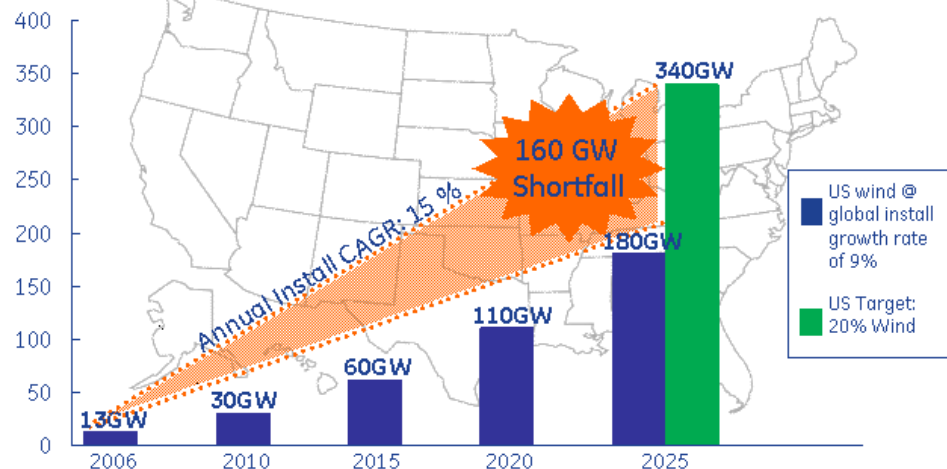

• Capacity Growth Needed:

	<u>2006</u>	<u>2025</u>
• Wind Turbines	~2,500	~30,000
• Wind Blades	~ <u>7,500</u>	~ <u>90,000</u>

Wind Turbine Blades

ecomagination™
a GE commitment

Key Facts

- > Wind energy is greatly expanding market
 - 2006 US installed capacity 2400 MW
 - 2007 US installed capacity 4000 MW
 - Since 2004, 500% increase in GE turbine production
- > GE is major supplier of turbines – over 8400 installations & 11,300 MW capacity
- > Current blades are glass-reinforced composites
- > Typical Blade Lengths
 - 1.5 MW – 37 m
 - 3.6 MW ~ 50 m
- > Primary need: Reduce cost of energy
 - > lower manufacturing & transportation cost
 - > increased energy capture



Current Standard Technology

Design


- Horizontal Axis
- Hollow Airfoil
- Semi-structural Skins
- Interior Spars Carry Most Load
- Bolted Hub Connection (e.g. barrel-nut)

Materials


- Glass fiber (limited carbon use)
- Epoxy, Polyester, or Vinylester Resin
- Foam or Balsa Core

Manufacturing Process

- Vacuum Infusion – one-sided tool
- Wet Laup
- Some Prepreg
- Fabricated in Halves and Bonded (usually)

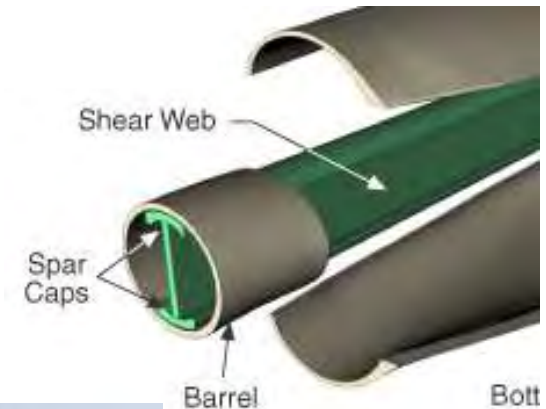

Root Connection

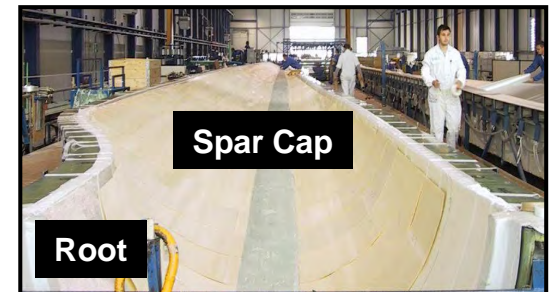

Manufacturing cost is major constraint

- typical as-manufactured cost is much less than 10 dollars per pound
- can't sacrifice cost incremental cost to produce energy

Special Design Considerations

- Loads Not Very Predictable
- High Fatigue Cycles ($\sim 1e9$)
- Deflection Constraints (e.g. tower strikes)
- Noise Limitations (especially land-based)
- Prone to Lightning Strikes
- Must Be Compatible with Low Cost Manufacturing




People notice when something goes wrong



Capture the Wind Energy...

Energy Conversion

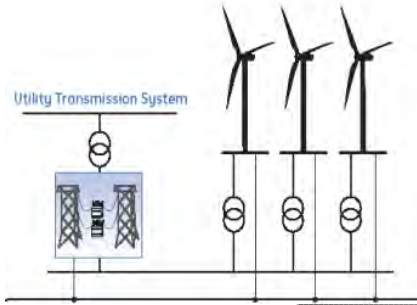


Light & Compact Drive-train




Technology to increase energy capture at the right COE



Energy Capture...Blades

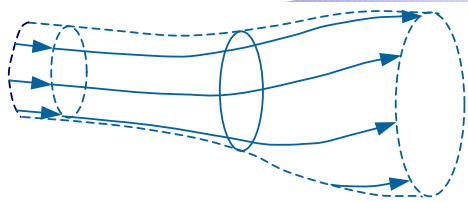



Optimized Blades



Support Structures




Control System

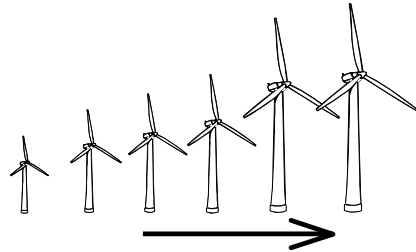

Blade Size – Factors Restricting Growth

Captured Power Increases with Square of Blade Length

Weight

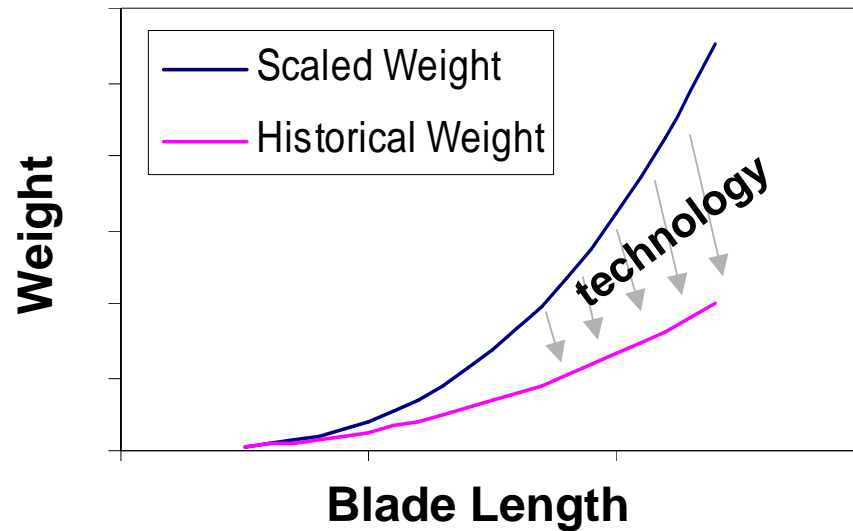

- New technology has been needed to allow growth in blade size without excessive weight
- Typical technological advances:
 - better materials
 - better designs
 - better manufacturing processes




Industry has been looking at selective use of carbon, but cost/weight benefit still unclear

Transportation

- Current blade sizes becoming very difficult to transport – especially by road
 - chord widths particularly limiting
- Offshore still a small percentage of total
- Possible solutions
 - Multi-piece blades assembled at site
 - On-site or near-site manufacturing
 - Innovative transportation






Dance with the Wind Energy...

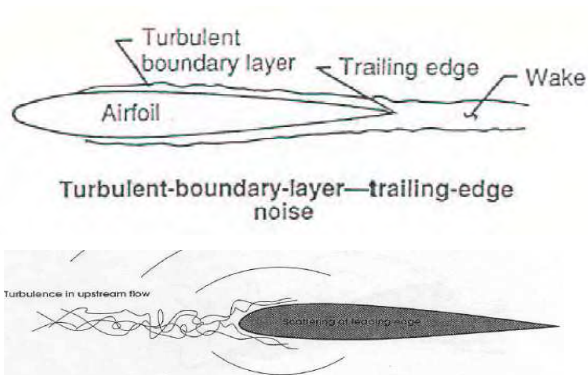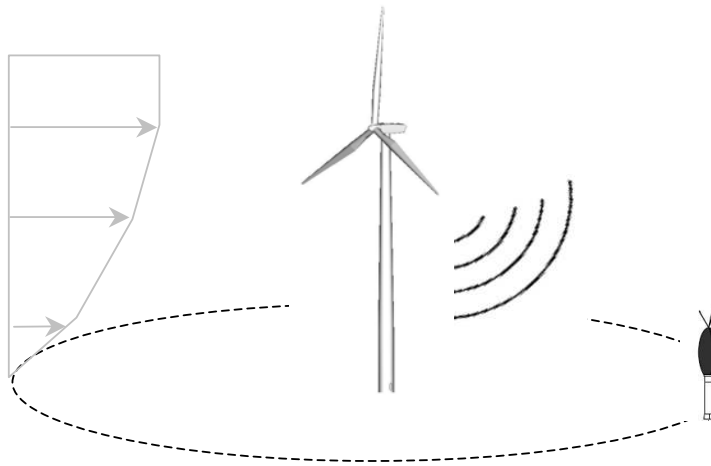



Create new airfoils to balance noise and performance

Reach the Wind Energy...

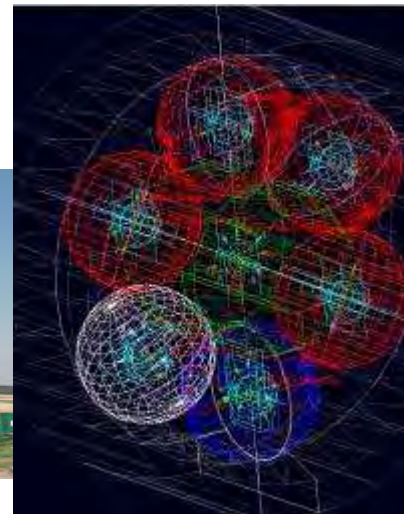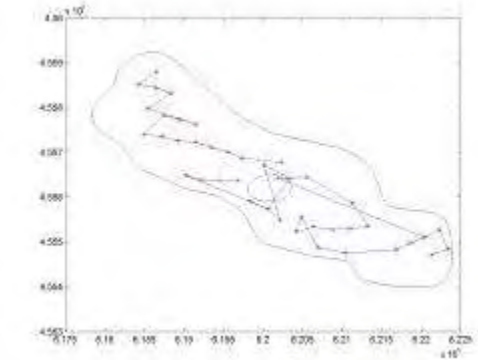

Technology to deliver turbines where they want to be

Negotiate with the Wind Energy...

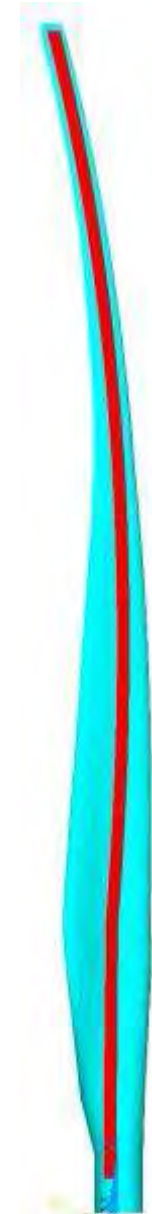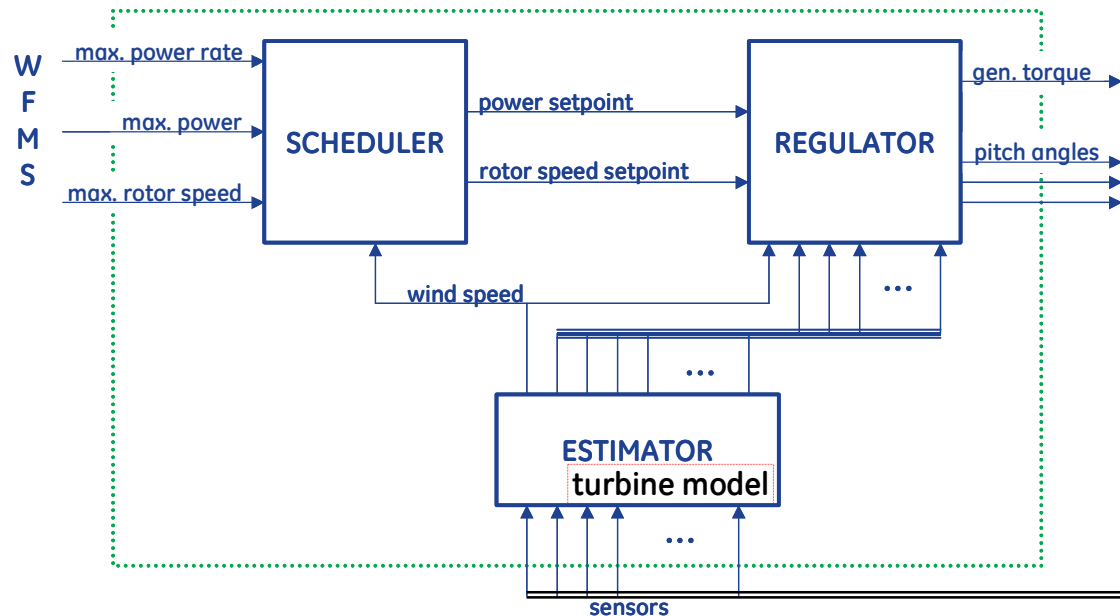

- **Business objectives captured at the turbine level**
 - Annual energy production
 - Trade life and production rate
 - Trade noise and performance
 - Adapt to the wind, the grid to fulfill needs

Making it happen... fast




Rapid Prototyping




Cost & Cycle Time for Tooling Often Controls Development Cycle

New Materials

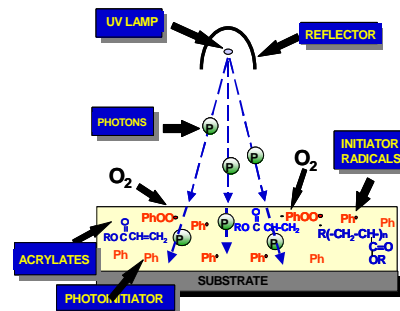


Automation

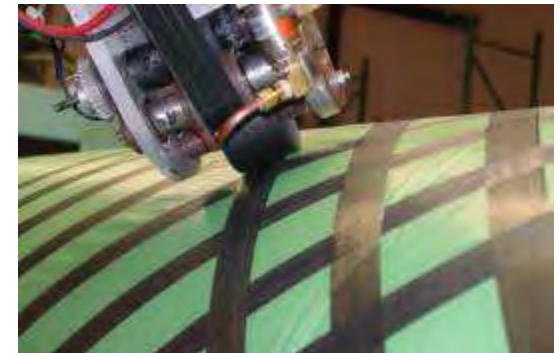

Offshore Oil & Gas

Importance of Deep Water Solutions

Gulf of Mexico Oil Production

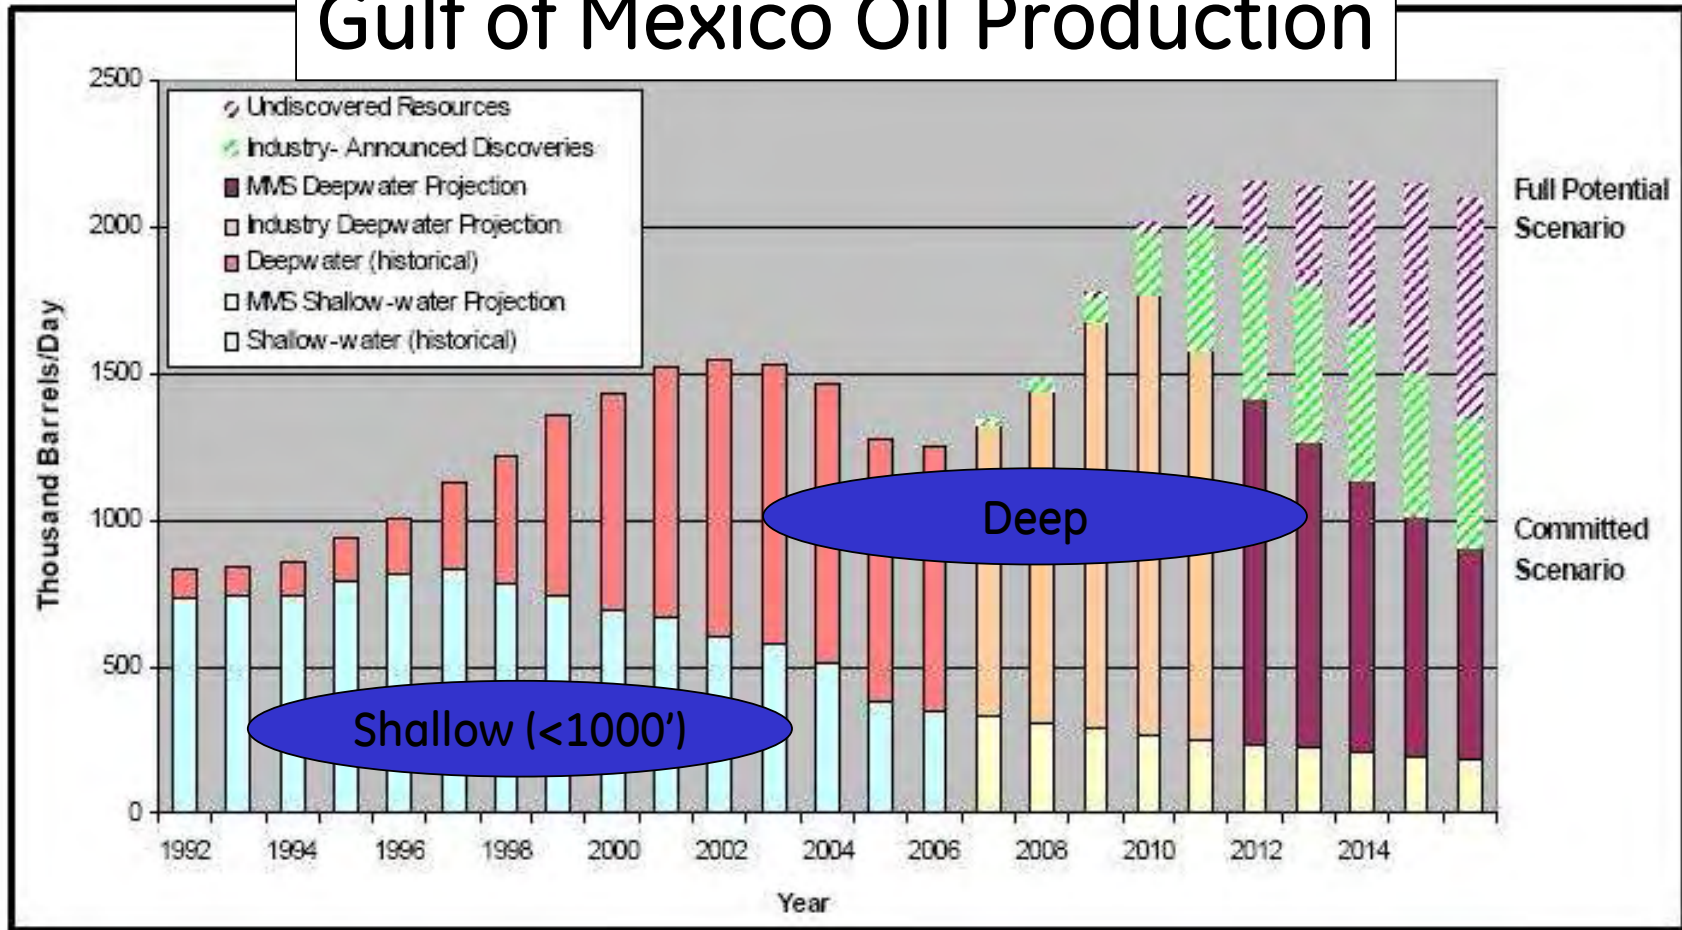

60% of world production is offshore
 53 million bbl/day
 \$200B annual expense

Composites for Offshore Oil



> Composites Currently Used in Subsea Installations as Protective Structures

> Composite Rigid Risers Have Been Subject of Numerous Development Programs

- available offshore resources moving to deeper and deeper water
- lighter weight could enable top-side development to depths > 10,000 ft
- each riser segment 70-90 ft. long
- *currently one unit in field*

> Composite Flexible Production Risers May be Nearing Product Introduction

- industry standard is non-bonded, layered metallic

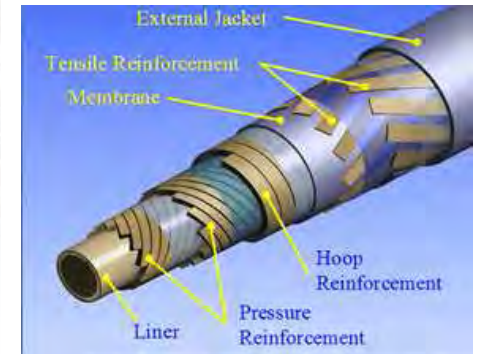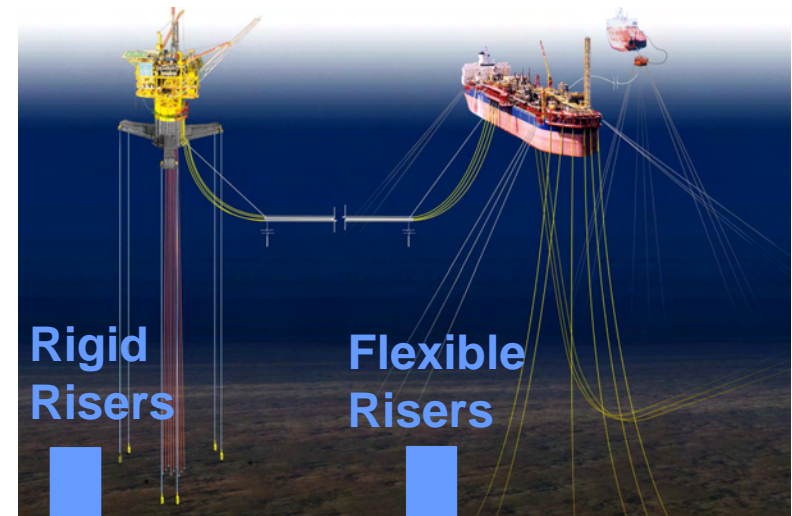

Fuel Cell Bipolar Plates

Function



- Distribute the fuel gas and air uniformly over the active areas
- Remove heat from active area
- Conduct current from cell to cell
- Prevent leakage of gasses

Requirements


- High electrical conductivity
- Lightweight
- Costs (plates are significant fraction of total)
- Corrosion Resistance

Common Materials

- Electro graphite (high cost)
- Carbon-carbon composite (high cost)
- Sheet metal (low cost; corrosion resistant varieties have high electrical contact resistance)
- Graphite foil (repeatability)
- Carbon fiber reinforced composites (intermediate cost, light weight)

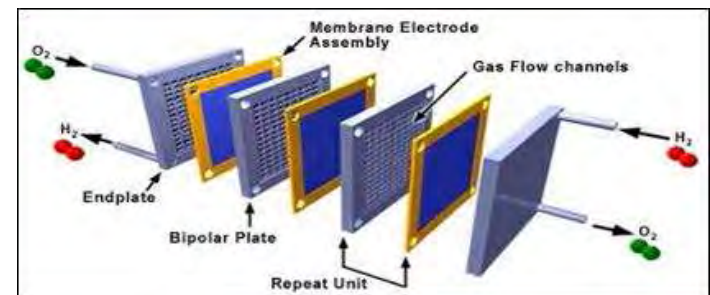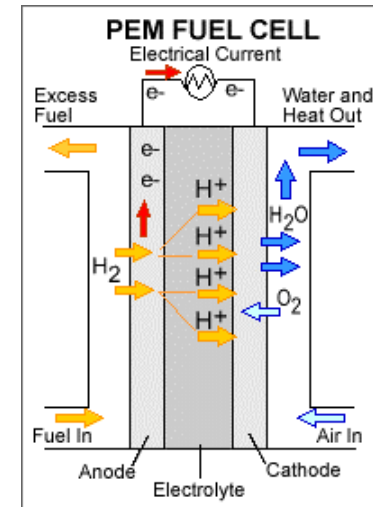


Backup

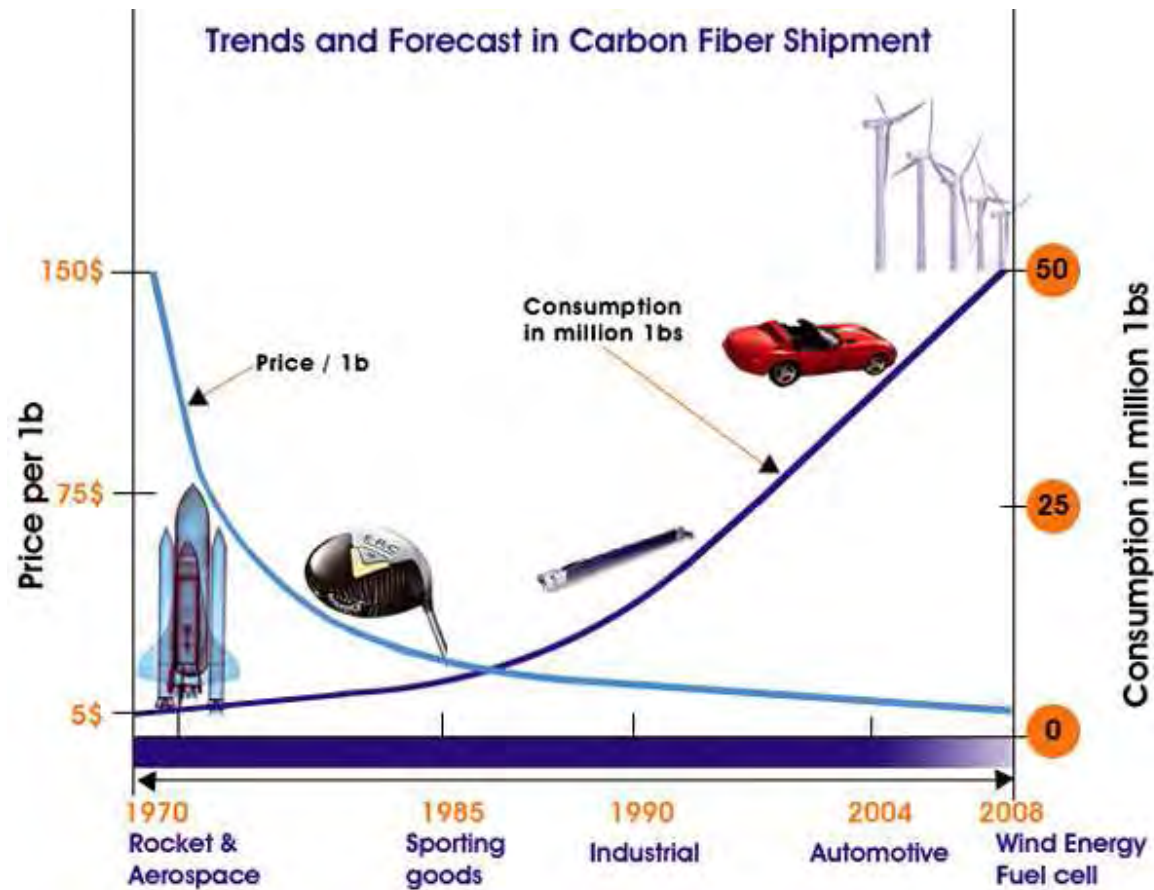

From “Growth Opportunities in the Carbon Fiber Market 2004-2010”

- [Enercon](#) (Germany)
- [Gamesa](#) (Spain)
- [General Electric](#) (USA)
- [Vestas](#) (Denmark), the world's largest manufacturer of wind turbines

Composites – Fibe-X Manufactured Wind Blades

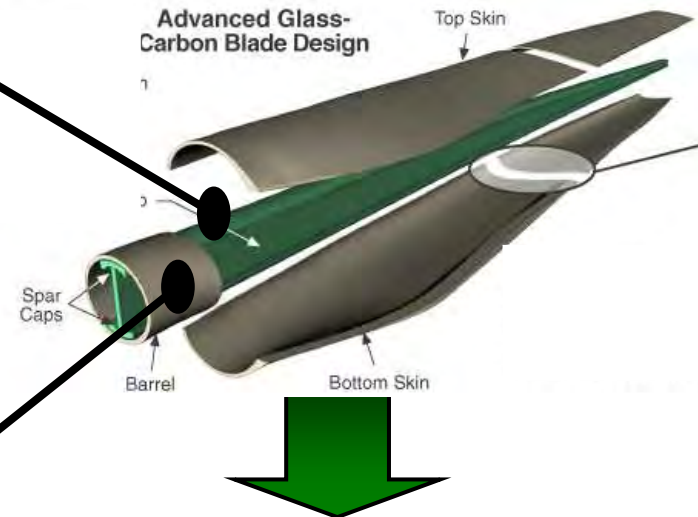

Hybrid Blade Construction
(VARTM + Pre-cured Components)

Key Concepts

- Modular Construction
- Automated Manufacturing (Quality)
- Regional Manufacturing
- Dimensional Stability
- Shipping & Handling
- Cost Control




Next Generation Wind Blade



~~6-Megawatt Turbine
70-Meter Blade (25 Tons)~~

17 Tons

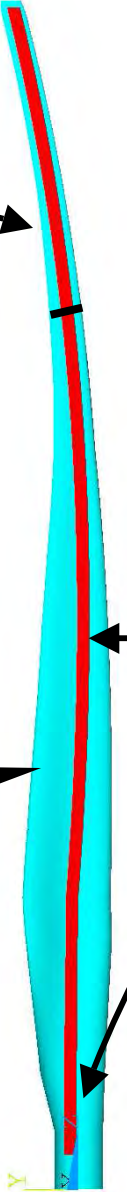

- ### Design CTQ's
- High Efficiency + Low Noise
 - Swept Airfoil Design
 - Hybrid Carbon and Fiberglass
 - Jointed Construction



- ### Manufacturing
- Automated Manufacturing
 - Logistics
 - Low Temperature Cure Resin

